



Product Features:

- Support Windows / Linux system
- Can install WIFI, 4G, 5G module
- Support 6*serial port,4*RS-232+2*RS-485 / 422
- Power: DC 12-36V

Specification:

QY-B5801		
CPU	J1900 i3-4010U、i3-7100U i5-4260U、i5-6200U、i5-7200U i7-4650U、i7-7500U	
RAM	2*DDR 3 / 2*DDR 4	
SSD	MSATA	1*MSATA
	SATA	1*SATA 2.5 inch
Show	HDMI	Most support 4096x2160px
I/O	USB	4*USB 3.0
	Serial Port	4*RS-232+2*RS-485 / 422
	Audio	RTLALC662 audio controller, LINE-out
	Expansion card slot	Multifunctional expansion cards
	Network Interfaces	2*RJ-45
Watch Dog		Reset, programmable interval time
RTC		Support RTC
Working Temperature		-20°C~70°C
Storage Temperature		-40°C~80°C
Humidity		90% (20±50°C)
Power		DC 12-36V

Expansion card slot:




Name	Configuration
Network module 1	2*RJ-45 card
Network module 2	4*RJ-45 card (support POE)
MINIPCIE Card	CAN card / M.2 NVME SSD / 5G module / 14 road GPIO
Serial port module 1	2*RS-485 / 2*RS-232
Serial port module 2	2*RS-485 / 4*RS-232
Battery power management module	Power-on support delayed power on, power off automatically when power off delay
Switching/analog	8 road / 16 road
Pull the hard drive	A 2.5-inch pull-out bay is available



Expand card install interfaces

Optional Fitting:

Model	Configuration
CPU	J1900 i3-4010U、i3-7100U i5-4260U、i5-6200U、i5-7200U i7-4650U、i7-7500U
RAM	2*DDR 3 (4GB / 8GB)
	2*DDR 4 (4GB / 8GB / 16GB)
SSD	MSATA:32GB / 64GB / 128 GB / 256GB / 512GB / 1TB
	SATA:120GB / 128GB / 240GB / 256GB / 480GB 512GB / 960 GB / 1TB
WIFI	7260an / 7260ac (with Bluetooth function)
4G module	4G+GPS

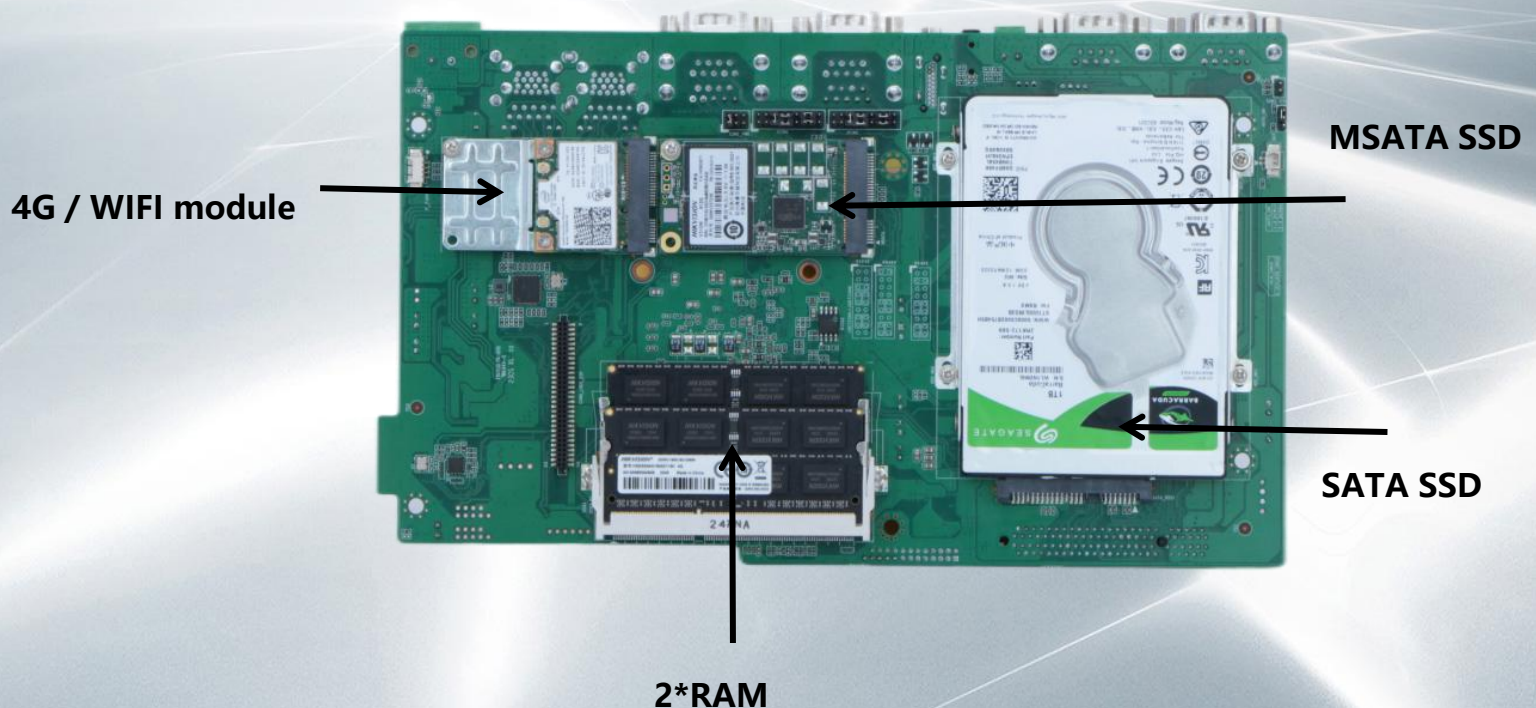

Size Drawing:

